





HSF

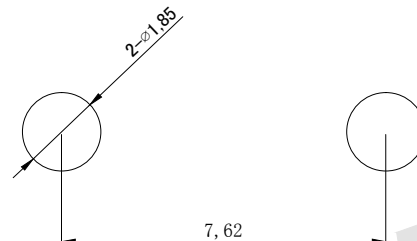

ROHS

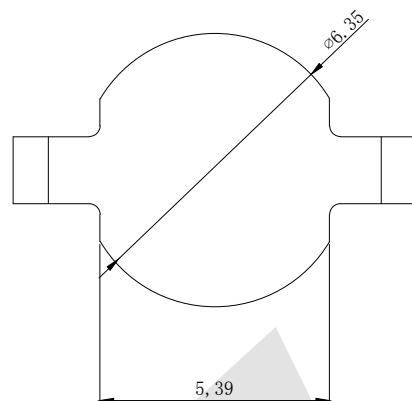

PCB LAYOUT

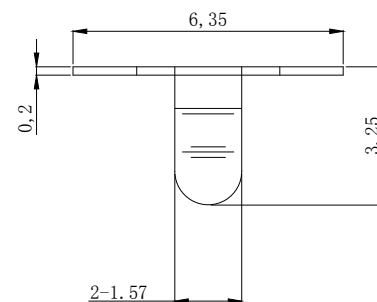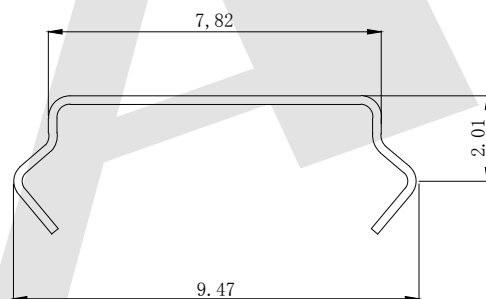

NOTES:

1. MATERIAL: Phosphor Bronze, T=0.20mm.
2. PLATING:
80U" Min TIN PLATED OVERALL
50U" Min NICKEL PLATED UNDER OVERALL
3. Voltage Parameters: 270V
4. Temperature Range: -40° C-270° C

Order code:

BS - S - SN - X - 165
① ② ③ ④ ⑤

- ① BS: Battery Shrapnel
- ② Apperance For The Product
- ③ Contact Plating
- ④ Packing method
A: Tray packing
R: Tape & reel packing
B: Bag packing
- ⑤ Product Number

S:180 TYPE

SI:NICKEL PLATE

SN:tin

G0: Gold Flash

G1: 3u" Gold

G2: 5u" Gold

G3: 10u" Gold

G4: 15u" Gold

G5: 30u" Gold

Unless Otherwise specified tolerance		ANTENK ELECTRONICS CO.,LTD Http://www.antenk.com E-mail:sales@antenk.com
X. ±0.50	X.XX: ±0.25	
X.X: ±0.35	X.XXX: ±0.10	
SCALE: As Shown	UNIT: mm	TITLE: Battery Shrapnel 165 Style
DRAW Wu Feng Rong	DATE 04/08/2021	
CHECK BobYang	DATE 04/08/2021	
3rd ANGLE PROJECTION		DRAWING NO: BS-R-SN-X-165
		PRODUCT NO: BS-R-SN-X-165

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		